



PERIJA Mini

Digital Sound Detector with Water Leakage Judgment Mode



**HIGH
SENSE
SOLUTIONS Inc.**

www.highsensesolutions.ca

PERIJA Mini is well-suited to water leak surveying on plastic pipes like PVC and PE, equipped with water leakage judgment mode.



PERIJA Mini VPRO

Digital Sound Detector with Water Leakage Judgment Mode

- HIGH SENSITIVITY, HIGH REABILITY
- AUTOMATIC LEAKAGE JUDGEMENT MODE
- CONTROLLED by PERIJA Mini APP
- ACCURATE, FAST, SMART, PROFESSINAL



PERIJA Mini VPRO

Digital Sound Detector with Water Leakage Judgment Mode

SPECIFICATION

- | | |
|--------------------|--|
| TECHNOLOGY | Acoustic |
| SENSOR | Internal Piezo-Electric |
| FREQUENCY RANGE | 200 – 4000 Hz |
| FILTERS | 4 Selectable Band Pass Filters
(HP: 200, 600Hz – LP: 2100, 4000Hz) |
| NOTCH FILTER | Off, 50Hz, 60Hz (Selectable) |
| AMPLIFICATION | 53dB±3 |
| ACTIVATION | Manual MUTE Key on PERIJA Mini APP
IR Sensor for Automatic MUTE Control (for Reflective Surfaces)
MUTE Key on PERIJA Mini Keypad |
| HEADPHONE | Wired Headphone: 3mm Stereo Headphone Jack |
| BATTERY | Unreachable Internal Li-ion Rechargeable Battery 3.7V 850mAh |
| DISPLAY | Without Display (Displayed on Smart Phone by PERIJA Mini APP) |
| ALJ™ MODE | (Automatic Leakage Judgment Mode) |
| IRAA™ MODE | (IR Acoustic Activation Mode) |
| filteROT™ MODE | (Filter Rotation Mode) |
| Data Communication | Bluetooth Low Energy (BLE) |
| Contact bar | 3 X 110 mm and 3 x 300mm contact bar |
| Dimension | 136 x 60 x 30 mm |




Internal Rechargeable Battery



USB Charger Connection



Bluetooth Communication



4 Band-pass Filters
2 Notch Filter



Filter Rotation Mode



Infrared Activation Mode



Leakage Judgment Mode




- HIGH SENSITIVITY, HIGH REABILITY
- AUTOMATIC LEAKAGE JUDGEMENT MODE
- CONTROLLED by PERIJA Mini APP
- ACCURATE, FAST, SMART, PROFESSIONAL



PERIJA Mini VPICK-UP

Digital Sound Detector with Water Leakage Judgment Mode

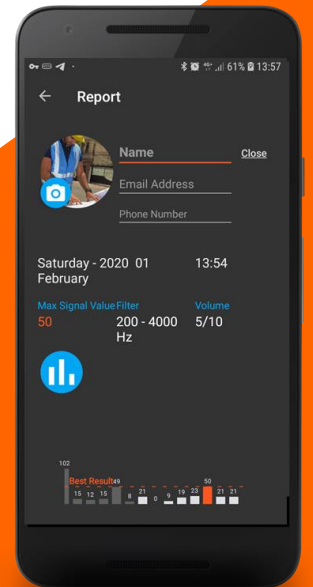


PERIJA Mini VPICK-UP

Digital Sound Detector with Water Leakage Judgment Mode

SPECIFICATION

- | | |
|--------------------|--|
| TECHNOLOGY | Acoustic |
| SENSOR | Internal Piezo-Electric |
| FREQUENCY RANGE | 200 – 4000 Hz |
| FILTERS | 4 Selectable Band Pass Filters
(HP: 200, 600Hz – LP: 2100, 4000Hz) |
| NOTCH FILTER | Off, 50Hz, 60Hz (Selectable) |
| AMPLIFICATION | 53dB±3 |
| ACTIVATION | Manual MUTE Key on PERIJA Mini APP
IR Sensor for Automatic MUTE Control (for Reflective Surfaces)
MUTE Key on PERIJA Mini Keypad |
| HEADPHONE | Wired Headphone: 3mm Stereo Headphone Jack |
| BATTERY | Unreachable Internal Li-ion Rechargeable Battery 3.7V 850mAh |
| DISPLAY | Without Display (Displayed on Smart Phone by PERIJA Mini APP) |
| ALJ™ MODE | (Automatic Leakage Judgment Mode) |
| IRAA™ MODE | (IR Acoustic Activation Mode) |
| filterROT™ MODE | (Filter Rotation Mode) |
| Data Communication | Bluetooth Low Energy (BLE) |
| Contact bar | 3 X 110 mm and 3 x 300mm contact bar |
| Dimension | 136 x 60 x 30 mm |

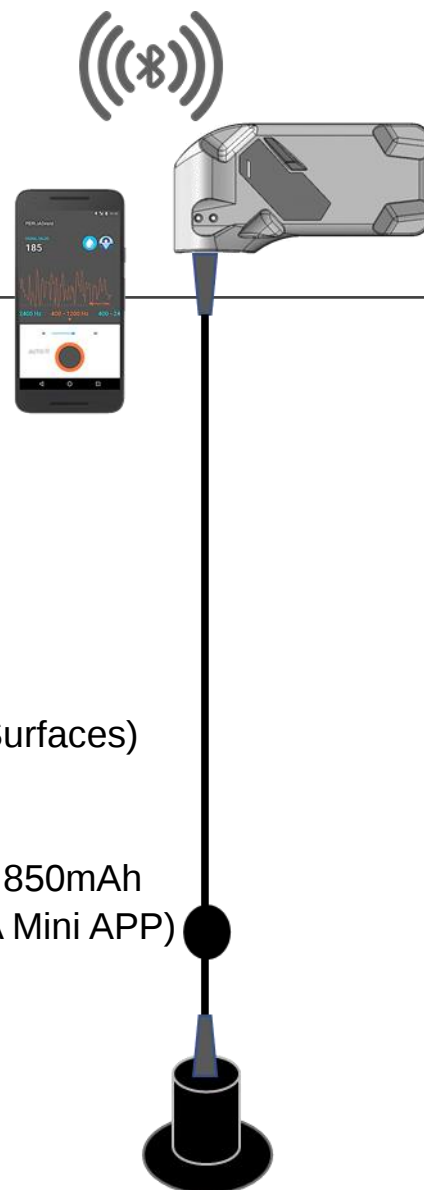


Internal Rechargeable Battery



USB Charger Connection



Bluetooth Communication



4 Band-pass Filters
2 Notch Filter



Filter Rotation Mode



Infrared Activation Mode



Leakage Judgment Mode



HIGH SENSE SOLUTIONS Inc.

Manufacturer of Underground Detection & Utility Instrument



Head Office:

35 WEST PEARCE ST., UNIT 23, RICHMOND HILL, ON, L4B 3A9, CANADA

www.highsensesolutions.ca

sales@highsensesolutions.ca

Tel: +1 (905) 597 2341

Tel: +1 (647) 588 6020